



Battleship: SolarDek™ Multicable Flashing Solution

Installation Guide for Concrete Interlocking Roof Tiles & More

2 types of base applications.

Uses: metal, rubber, tile-clay and concrete, slate, acrylic, GRP

Fast Flash® DRF14MCS:

Where adhesion preferred (new/cleaner tiles). Other roof membrane types. Only use where adhesive will bond. If wet, dusty or mossy, clean area to be adhered on tiles first.

Perform® DLF14MCS:



For older more challenging installs, where adhesion is more difficult (wet, mossy, tiles/roof).

Shape designed for more roof types and profiles.



Fig 1.

Cut 30 to 80mm slot in tile from bottom of tile upwards, 80mm can be narrowed if only 2 cable ports used on single side.

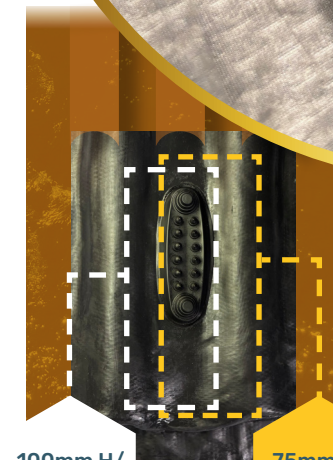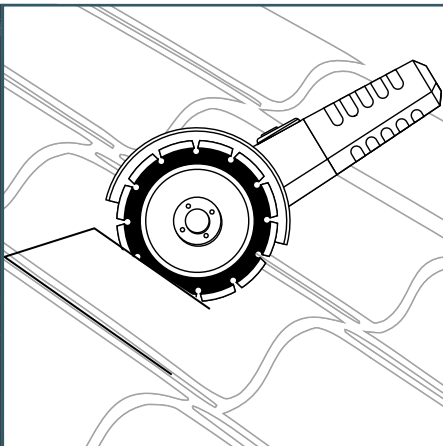

100mm H/
Lap 260mm

75mm H/
Lap 210mm

Concrete roof tile
420 x 300 mm

Headlap
75mm/100mm

Fig 2.

Pull cables through cut out slot.

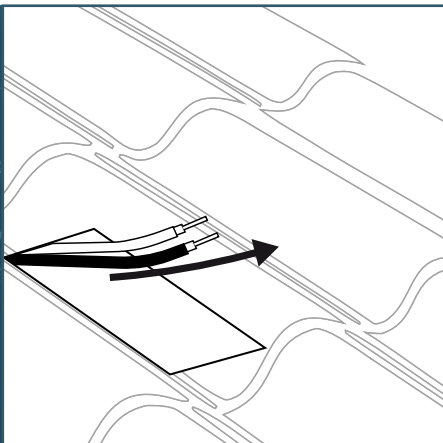


Fig 3.

12-20mm cable cut aperture to suit cable being used, and quantity of cables.

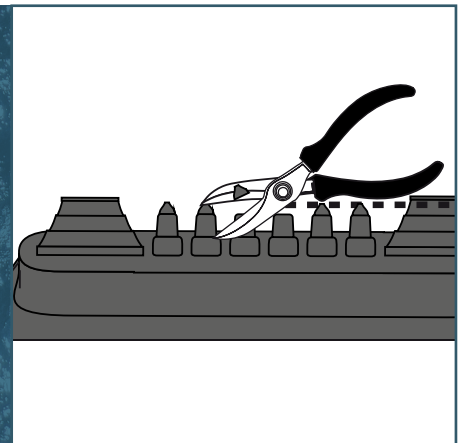


Fig 4.

Push cables through your cut cable apertures on rubber boot. Slide flashing into place over and along cables so that enough cable is exposed for future connections.

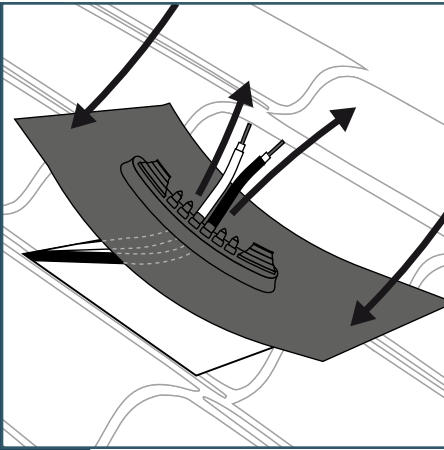


Fig 5.

If using **Fast Flash** version, tear off white backing layer (just prior to dressing) to expose butyl adhesive for adhering to roof tiles.

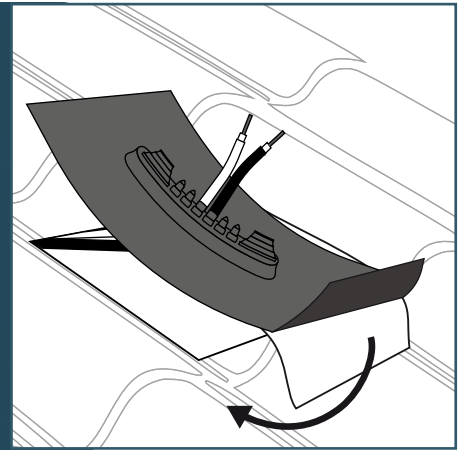


Fig 6.

Dress the Perform or Fast Flash flashing to the tiles carefully, pressing into contours by hand, or by using a Fast Flash soft hammer.


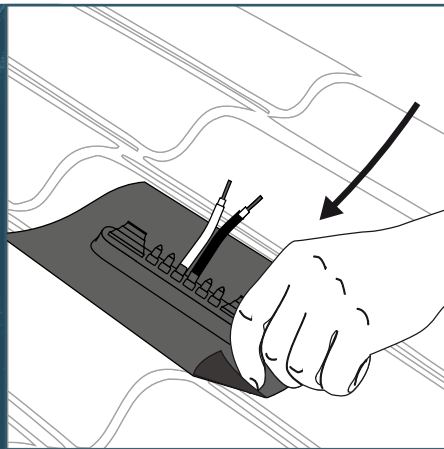


Fig 7.

Remove surface protection film when fully installed and dress to tile.

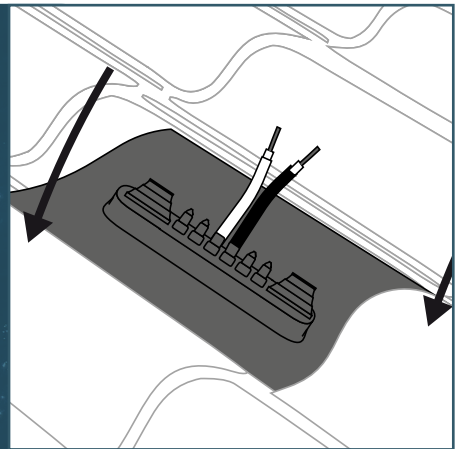


The Ultimate Lead Replacement Waterproofing Flashing for Every Roof

Vastly superior products, only using quality tried, tested and certified.

EXCLUSIVE
Lead-free. Hassle-free. Future-ready.
Join the lead-free revolution with **DEKS SolarDek™**.


Flashings of distinction!
With DEKS quality SolarDek™ EPDM.

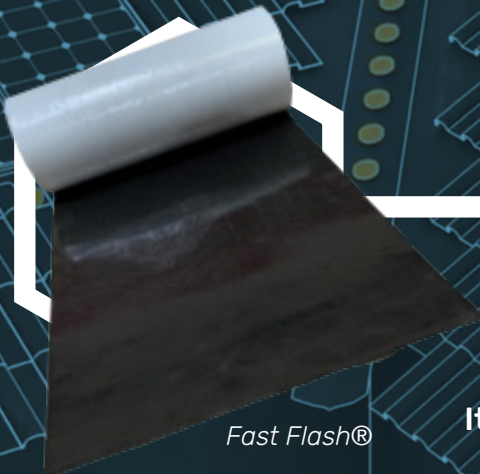

Fast Flash®



It's cheaper to fit than go back & repair

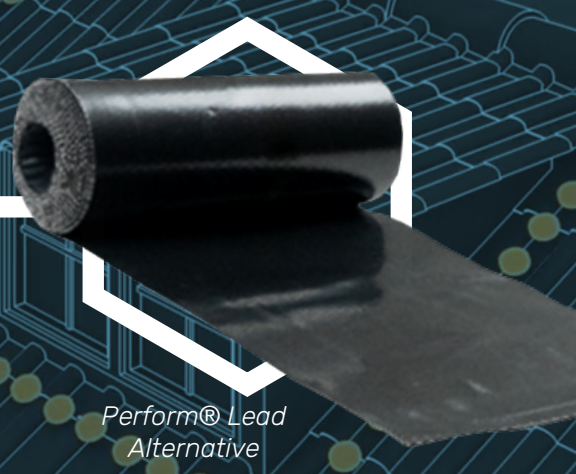

Perform® Lead Alternative

Easy to install and peace of mind for contractor and customer